



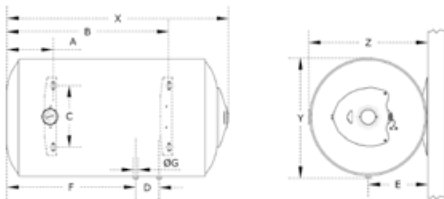

# Taurus / Taurus BF

Mid capacity electric water heater

- Entirely manufactured in Italy
- The tank is enamelled with a titanium-glass powder process, highly hygienic, antishock and corrosion free.
- The series ranges from 50 to 150 liters
- Thermometer in robust ABS
- Magnesium anode - Protecting tank from galvanic corrosion
- 5 bolts flange - Robust sealing, EPDM gasket, 70 mm manhole access to the appliance
- External regulation - On vertical model, stepless adjustment
- Thermostat - Double safety design: regulation, with antifrost setting and safety, with manual reset
- **TAURUS BF is also available with BLUEFOREVER enamelled element.** This heat treatment obstacles incrustations of limestone. Lifespan of the element and appliance is then highly increased, above all maintaining unvaried performances.



		50 VE	80 VE	100 VE	120 VE	150 VE	50 HO	80 HO	100 HO	120 HO	150 HO
<b>X</b>	mm	440	440	440	440	440	565	770	990	1135	1255
<b>Y</b>	mm	555	755	995	1130	1175	440	440	440	440	440
<b>Z</b>	mm	460	460	460	460	460	460	460	460	460	460
<b>A</b>	mm	185	185	185	190	190	200	180	200	190	200
<b>B</b>	mm	-	-	-	915	955	345	555	740	915	955
<b>C</b>	mm	265	265	265	265	265	265	265	265	265	265
<b>D</b>	mm	100	100	100	100	100	100	100	100	100	100
<b>E</b>	mm	130	130	130	130	130	230	230	230	230	230
<b>F</b>	mm	-	-	-	-	-	180	355	570	720	760
<b>G</b>	inches	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M	1/2" M

VERTICAL EXECUTION			50 VE	80 VE	100 VE	120 VE	150 VE
DHW tapping profile			M	L	L	L	L
ERP Class	(G - A Class)		<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>
Capacity		litres	50	80	100	120	150
Power		W	1500	1500	1500	1500	1500
Heating time	ΔT 35°C	minutes	1 h 26'	2 h 18'	2 h 53'	3 h 28'	4 h 19'
	ΔT 45°C	minutes	1 h 51'	2 h 58'	3 h 42'	4 h 27'	5 h 34'
Weight		Kg	16	20.5	25	28.5	29.5

HORIZONTAL EXECUTION			50 HO	80 HO	100 HO	120 HO	150 HO
DHW tapping profile			M	M	L	L	L
ERP Class	(G - A Class)		<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>	<b>C</b>
Capacity		litres	50	80	100	120	150
Power		W	1500	1500	1500	1500	1500
Heating time	ΔT 35°C	minutes	1 h 26'	2 h 18'	2 h 53'	3 h 28'	4 h 19'
	ΔT 45°C	minutes	1 h 51'	2 h 58'	3 h 42'	4 h 27'	5 h 34'
Weight		Kg	16	20.5	25	28.5	29.5